


# POLAR

## Invisible Downlight


Trimless version downlight intergrates the light as a unit with the ceiling, illuminating the art of lighting and high taste, high-ended lighting demands. Performance, durability and versatility feature this sophisticated version with invisible ring.




### Round



Ø 117mm  
( $\varnothing$ 82)




Ø 156.5mm  
( $\varnothing$ 112)

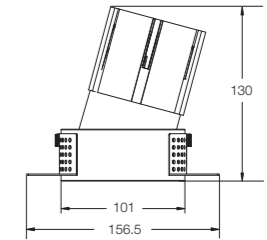


Ø 156.5mm  
( $\varnothing$ 112)

Power	10W	15W 20W	30W
Lumen Output	650lm	975lm 1300m	1950lm
Beam Angles	15° 24° 30° 36°	15° 24° 30° 36° 60°	15° 20° 30° 36° 45°
Colour Temperature	2700K   3000K   4000K   5000K	2700K   000K   4000K   5000K	2700K   3000K   4000K   5000K
CRI	92+   97+	92+   97+	92+   97+


### Square



Ø 133mm  
( $\varnothing$ 72\*72)

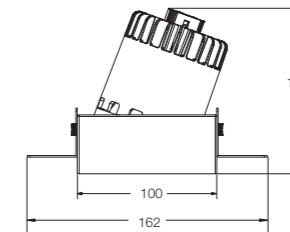

Ø 162mm  
( $\varnothing$ 102\*102)

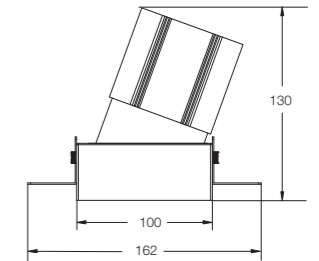

Ø 162mm  
( $\varnothing$ 102\*102)

Power	10W	15W 20W	30W
Lumen Output	650lm	975lm 1300m	1950lm
Beam Angles	15° 24° 30° 36°	15° 24° 30° 36° 60°	15° 20° 30° 36° 45°
Colour Temperature	2700K   3000K   4000K   5000K	2700K   3000K   4000K   5000K	2700K   3000K   4000K   5000K
CRI	92+   97+	92+   97+	92+   97+

### Finishes

UV Textured White

IP 20

3yr Warranty

Dimmable

### General Specifications

Material | Powder Coated Aluminium

Lifetime | >60,000h L70

 Colour Deviation | SDCM≤3

 Different dimming

 Excellent thermal management


### Driver

Power Factor | >0.90

240V Remote PC Dimmable Driver

Dimming Type | DALI, TRIAC, 1-10V

### Accessories

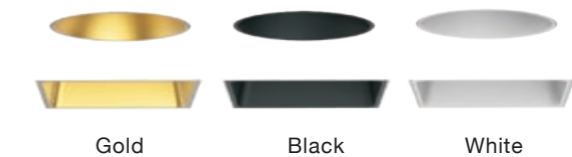

Gold

Black

White

### Notes

- Different wattage can be provided upon request  
- Customization for non-standard solutions in terms of light source, color, length and other specifications.